

EBARA

Model EPD / OPTIMA Pro Drainer™ sump, drainage



EBARA

EBARA Fluid Handling

an EBARA International Corporation company

Model EPD/OPTIMA

Features

- High quality stainless steel (*Note:* Optima has Noryl impeller)
- Available in 1/3, 1/2, 3/4, 1, 1 1/2 HP models • **Single and three phase models available**
- **Air filled, continuous duty rated**, permanent split capacitor motors •

Built-in thermal protection with automatic reset (Single Phase Only)

- Built to **operate whether fully or partially submerged**
- **Oil lubricated double mechanical shaft seal** (1/2 - 1 1/2 HP models)
- **Temperature rating to 122°F/50°C; 140°F/60°C intermittent duty**
- **20' UL/CSA approved**, water resistant #16 AWG cord
- Capacities to 88 GPM, heads to 62 feet
- Optima and EPD slimline automatic models **can operate in a 12" diameter or 8" x 8" square basin**


Applications

- Residential
- Commercial
- Industrial
- Drainage
- Seepage
- Effluent/containment transfer
- Waste water (from trays, wet bars, washing machines)
- Empty water storage structures
- Decorative fountains
- Irrigation
- Mound systems, leach fields
- Move water/effluent to sewage systems



**Note: UL and CSA listed; Model Optima UL certified only.*

EPD, Optima selection chart

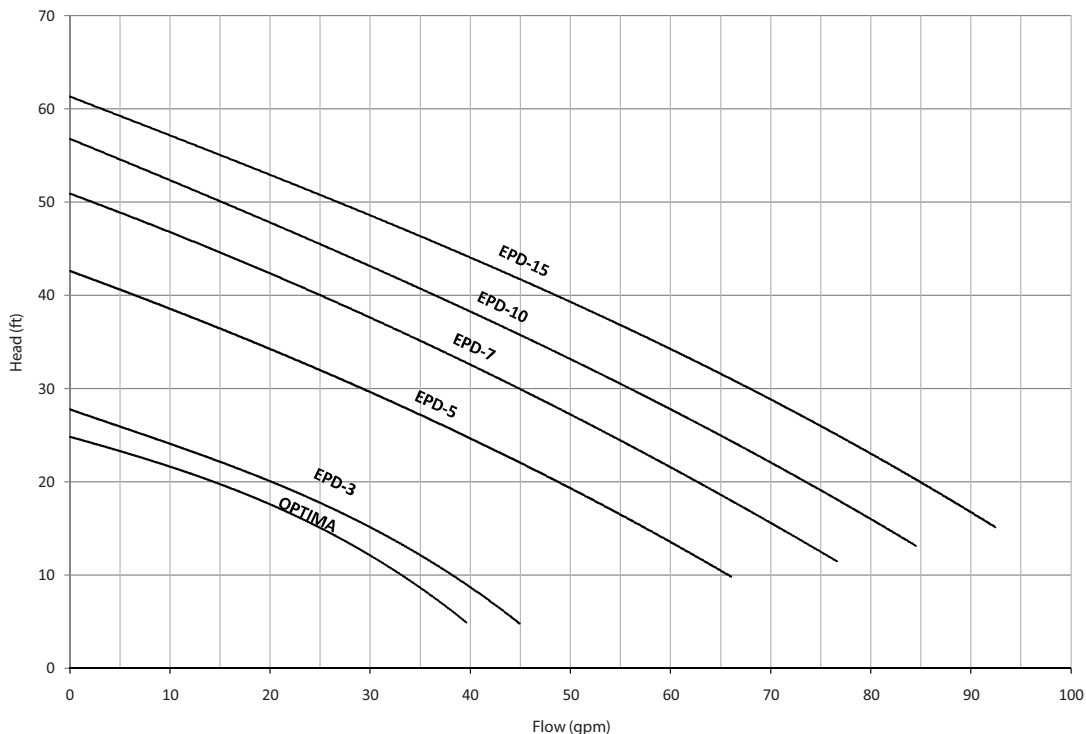

EBARA Fluid Handling

1651 Cedar Line Drive • Rock Hill, SC 29730 • telephone: (803) 327-5005 • fax: (803) 327-5097

www.pumpsebara.com

© 2011 EBARA International Corporation, All rights reserved.

EFHEPD 1011