

Ahead Beyond

Model 3U End Suction Centrifugal Pump





Ahead > Beyond


CENTRIFUGAL PUMPS

Model 3U

Features:

- Close coupled design saves space; simplifies maintenance and installation.
- Stainless steel liquid end components high quality; corrosion resistance, NPT threaded connections.
- Versatile mounting- can be installed horizontally or vertically.
- Back pull out construction- allows for assembly and overhaul of the impeller and seal without distorting suction and discharge connections.
- Top centerline discharge and foot support under casing ensures self-venting and reduces misalignment from pipe loads.
- High operating efficiency lowers operating costs.
- High guality mechanical shaft seals and o-rings available for standard pumping requirements or optional high temperature and chemical duty operation.
- Available as a complete pump or as a kit.

SELECTION CHART

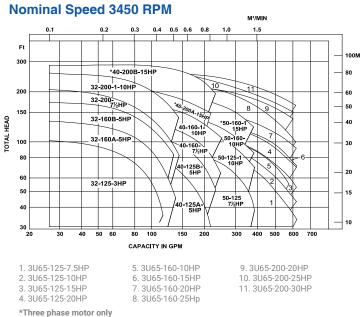

Specifications:


- Suction Size: 2" to 3"
- Discharge Size: 1 1/4" 2 1/2"
- Power Range: 1 to 30 hp
- Capacity: 5 to 633 gpm
- Head: 9 to 282 feet
- Liquid: Clean Water, Glycol, Dielectric Fluid

Applications:

- Pressure Boosting
- Plant Services
- Irrigation
- Water Supply Systems
- Liquid Transfer
- Ultrapure Water Systems
- Water Reclamation and Treatment
- Temperature Control
- Air Conditioning Systems

Nominal Speed 1725 RPM

3U

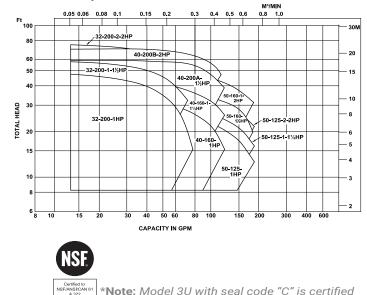



EBARA Pumps Americas Corporation

www.pumpsebara.com



Applications

Plant Services • Liquid Transfer • Water Supply Systems • Ultrapure Water Systems Water Reclamation and Treatment • OEM Equipment

- Your Local EBARA representative: ____

ENGINEERED for **PERFORMANCE**

EBARA Pumps Americas Corporation

1651 Cedar Line Drive, Rock Hill, SC 29730 t (803) 327-5005 | f (803) 327-5097

www.pumpsebara.com