



**EBARA**


# MODEL DL3FU

**Submersible Pump**



**eDYNAMiQ**

Eco, Dynamic and Integrated Quality

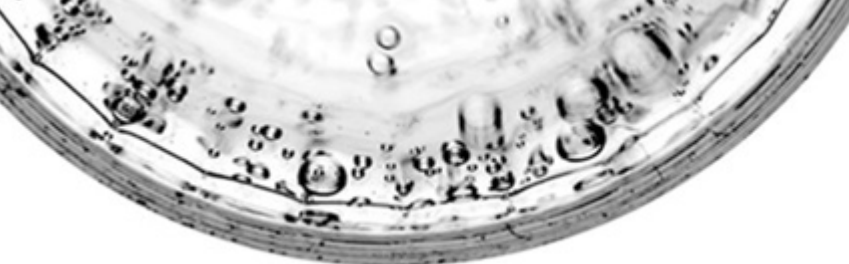

# eDYNAMiQ

Eco, Dynamic and Integrated Quality

## Key Features

- Heavy-duty, premium (IE3) efficiency, air-filled motor – operates cooler with higher efficiencies, resulting in reduced operating costs
- Oversized lifting bail – Stainless Steel
- Internal Cooling System (ICS) – Stainless Steel Cooling Jacket
  - Standard for 7.5hp - 60hp
  - Optional for 2hp - 5hp
- Multi-conductor cable – Single cable for power and control
- Watertight cable entry system – protects against moisture and capillary action; reduces maintenance costs
- Minimum 50,000 hours single and double row thrust bearings – long dependable operation, lowers maintenance costs
- High-efficiency impellers – handle stringy, fibrous material with the ability to pass large solids and prevent clogging; impellers are optimized for hydraulic coverage lowering operating costs
- Double mechanical seals - operate in a glycol solution (ICS motors) or an oil bath (non-ICS motors) providing longer service life and lower maintenance costs
- Stainless steel shaft – high tensile strength and corrosion resistance
- Replaceable wear components – maintain working clearances while reducing casing and volute costs


## Applications

- Industrial
- Municipal
- Water
- Wastewater
- Lift Stations
- Packaged Pump Systems
- Storm Water and Flood Control

## Specifications

- Discharge Size: 2" to 12"
- Range of HP: 2 to 60 HP
- Capacity: 13 to 4000 GPM
- Head: 7 to 243 Ft.
- Max. solid diameter: 3 1/4"
- Max. liquid temperature: 104°F (40°C)
- FM explosion proof available

Detailed performance and technical data available  
at [pumpsebara.com/products/dl3fu/](http://pumpsebara.com/products/dl3fu/)



Your Local EBARA Representative:



**EBARA Pumps Americas Corporation**

1651 Cedar Line Drive  
Rock Hill, SC 29730  
(803) 327-5005  
[pumpsebara.com](http://pumpsebara.com)