





## TH Series

## **Features**


- Close coupled or frame mounted design
- Design saves space
- Standard flanged connections; optional threaded connections available
- Back pullout construction
  - provides for ease of maintenance or repair without disturbing suction and discharge connections
- Top centerline discharge ensures self-venting
- Integral foot mounted casing facilitates back pull-out feature
- High quality mechanical shaft seals and o-rings
- Optional Cast Stainless Steel Construction

## **Applications**


- Water supply
- Drainage
- Irrigation
- Air conditioning
- Building installations
- Condensate circulation
- Cooling services
- General industries
- Transfer Pump
- Booster Pump

## **Selection charts**

1750 RPM

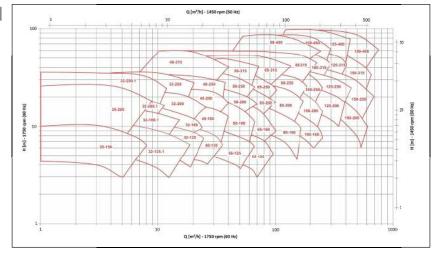

3500 RPM

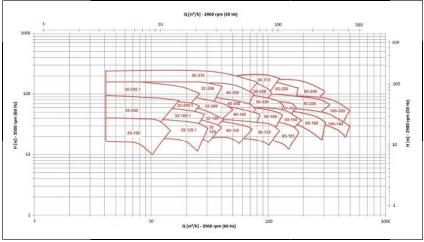

\* All specifications subject to change without notice.

