


Selection Chart - EFQT

Model EFQT

Selection chart

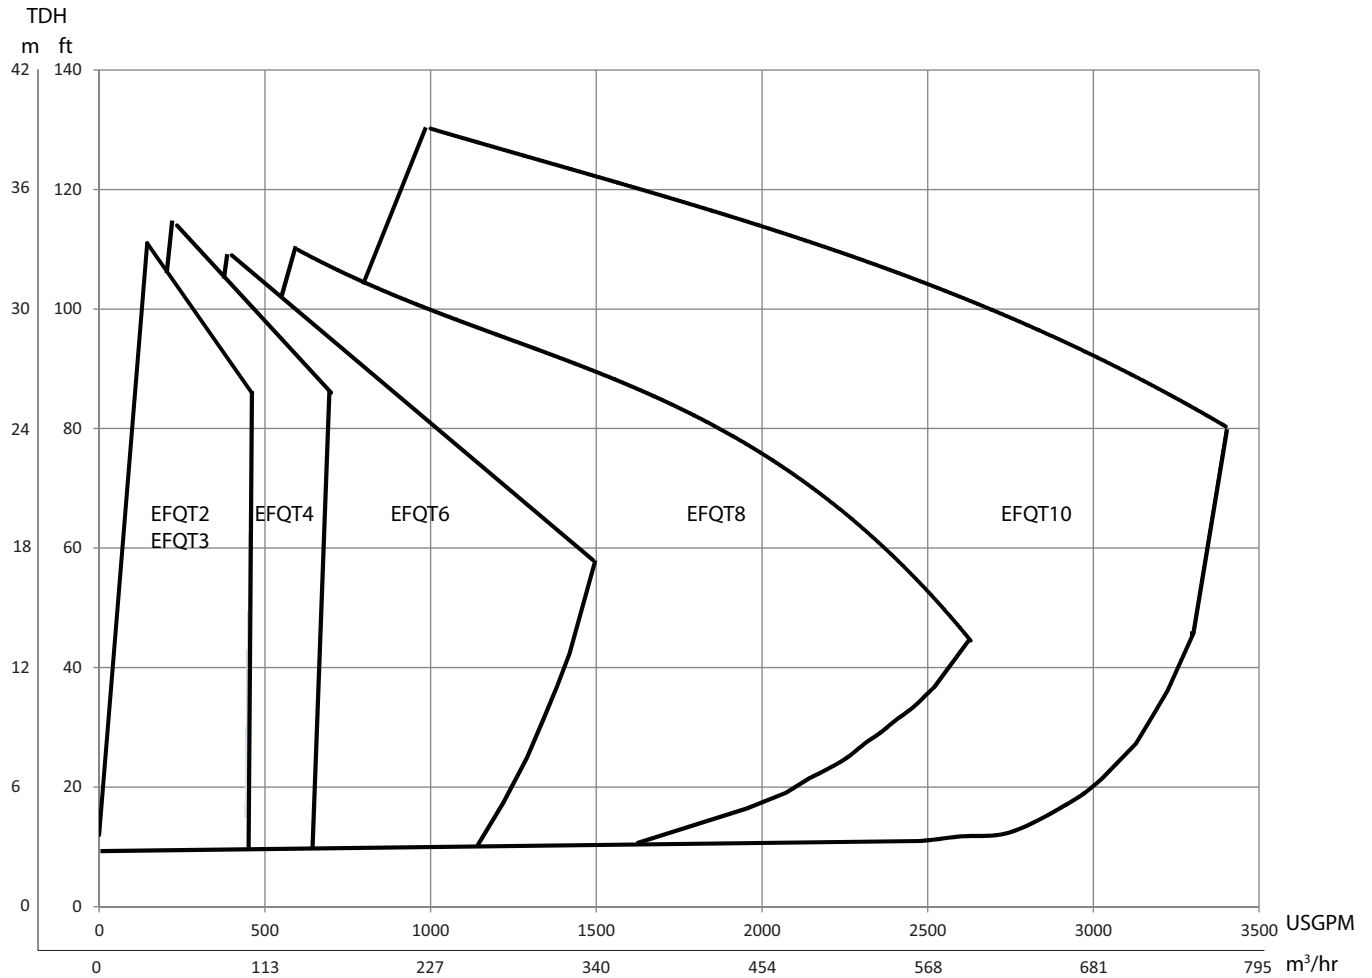


EFQT12 - Please consult Factory




Selection Chart - EFQU

Model EFQU

Selection chart

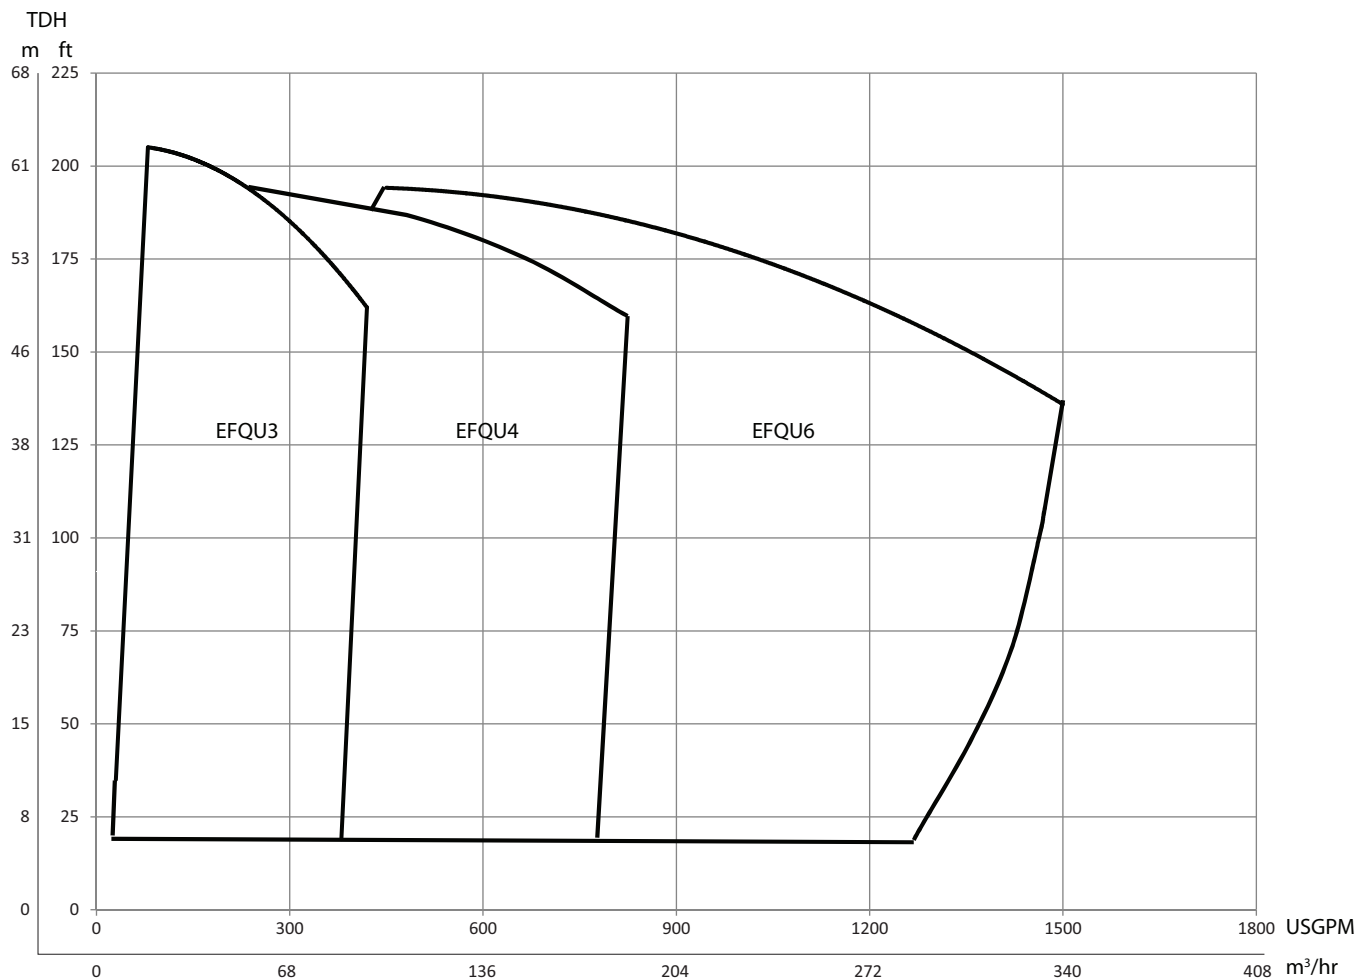

Suction Speed Flow Curve

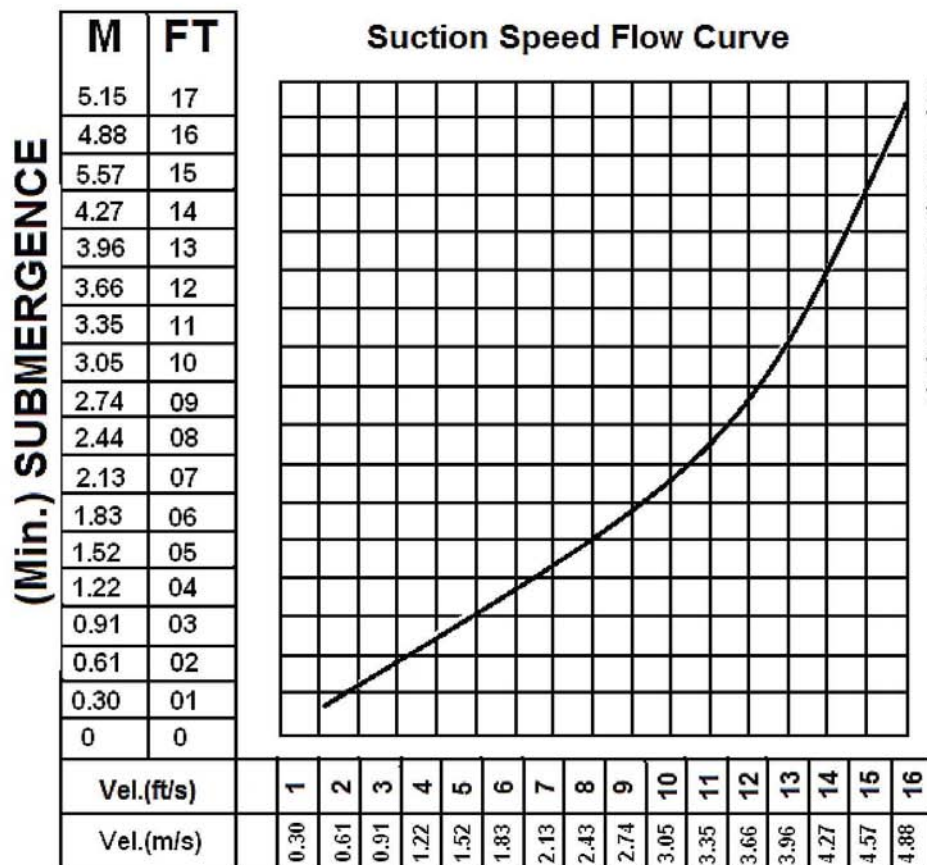

NOTE # 1:

The suggested suction should have the same nominal diameter as the pump, so that the solids will be totally swept up.

NOTE # 2:

If the speed is higher than (3.5 m/s) 11.5-ft and if there is a need for "Higher NPSH", contact the factory.




Performance Curves

Project: GPM: TDH: EFF: HP: Chk'd: Date:

EFQT2

Impeller Diameter: 6.38"

S.G.: 1.0

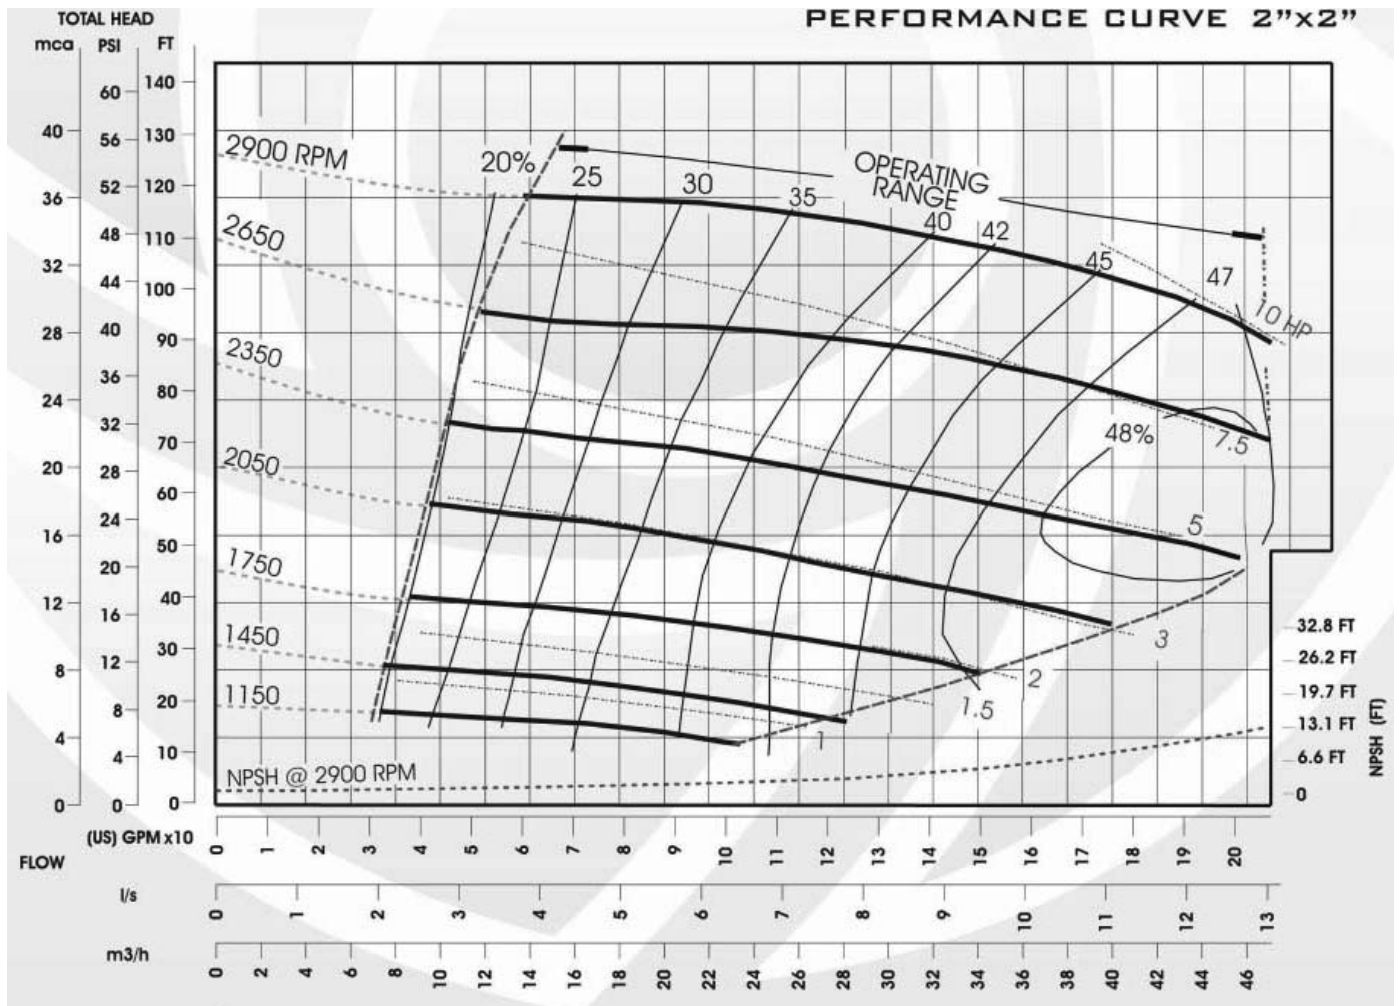

Data Sheet

Net Weight: 203 lbs. (92kg)
 Shipping Weight: 252 lbs. (114kg)
 Impeller Dia.: 6-1/4" (158.75mm)
 R.P.M.: From 1150 RPM to 2900 RPM
 Max. Solids: 1-3/4" (44.45mm)

Repriming Lifts

RPM	1150	1450	1750	2050	2350	2550	2650
FEET	24	25	25	25	25	25	25
METERS	7.3	7.6	7.6	7.6	7.6	7.6	7.6

Figure NPSH prior to using above chart. DO NOT use as NPSH Suction Lift.
 1.75" Dia. Max. Spherical Solids.




Performance Curves

Project: GPM: TDH: EFF: HP: Chk'd: Date:

EFQT3

Impeller Diameter: 8.75"

S.G.: 1.0

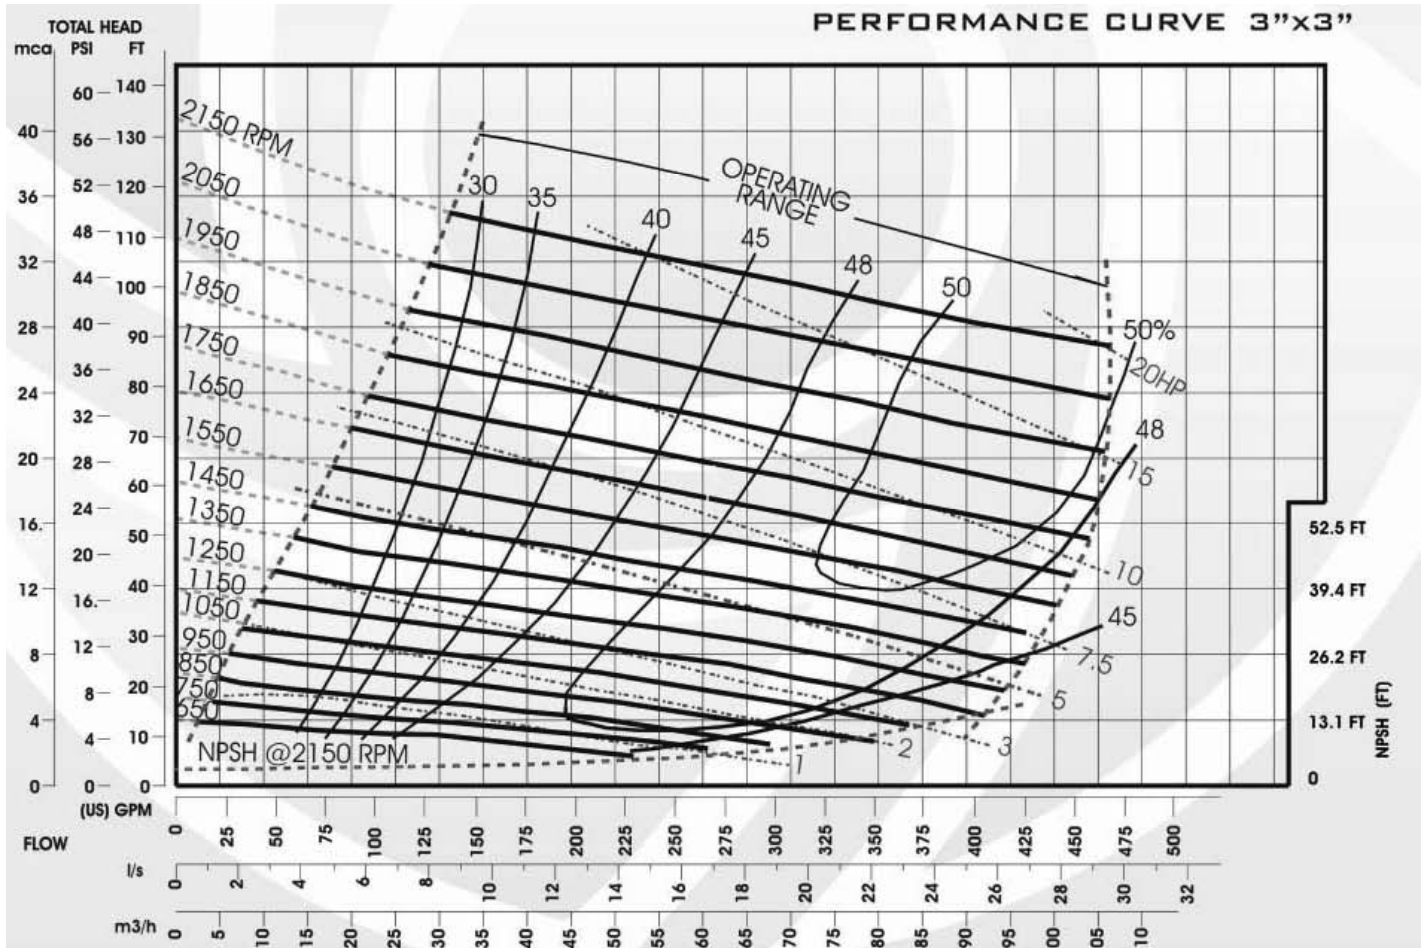

Data Sheet

Net Weight: 404 lbs. (183kg)
 Shipping Weight: 452 lbs. (205kg)
 Impeller Dia.: 8-3/4" (222.3mm)
 R.P.M.: From 650 RPM to 2150 RPM
 Max. Solids: 2-1/2" (63.5mm)

Repriming Lifts

RPM	650	750	850	950	1050	1150	1250	1350	1450	1550	1650-1750	1850-2150
FEET	5	5	8	10	13	16	18	19	20	21	22	25
METERS	1.5	1.8	2.4	3.1	4.0	4.9	5.5	5.8	6.1	6.4	6.7	7.6

Figure NPSH prior to using above chart. DO NOT use as NPSH Suction Lift.

2.5" Dia. Max. Spherical Solids.


Performance Curves

Project: _____ GPM: _____ TDH: _____ EFF: _____ HP: _____ Chk'd: _____ Date: _____

EFQT4

Impeller Diameter: 9.75"

S.G.: 1.0

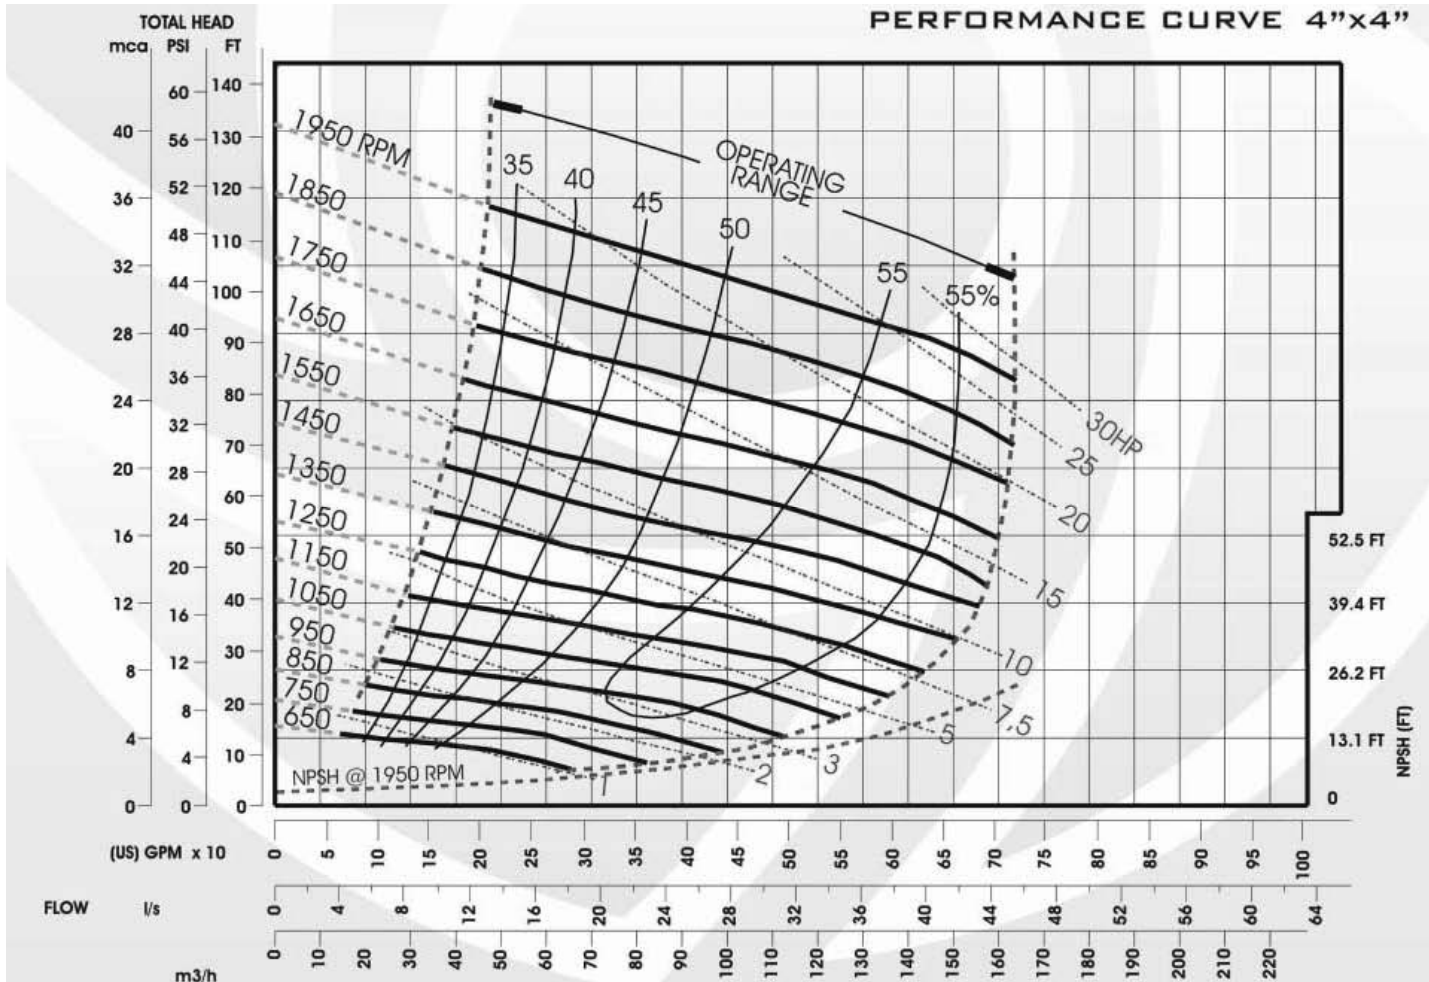

Data Sheet

Net Weight: 600 lbs. (295.5kg)
 Shipping Weight: 655 lbs. (280kg)
 Impeller Dia.: 9-3/4" (247.65mm)
 R.P.M.: From 650 RPM to 1950 RPM
 Max. Solids: 3" (76.2mm)

Repriming Lifts

RPM	650	750	850	950	1050	1150	1250-1950
FEET	5	8	16	19	22	24	25
METERS	1.5	2.4	4.9	5.8	6.7	7.3	7.6

Figure NPSH prior to using above chart. DO NOT use as NPSH Suction Lift.

3.0" Dia. Max. Spherical Solids.



Performance Curves

Project:

GPM:

TDH:

EFF:

HP:


Chk'd:

Date:

EFQT6

Impeller Diameter: 12.375"

S.G.: 1.0

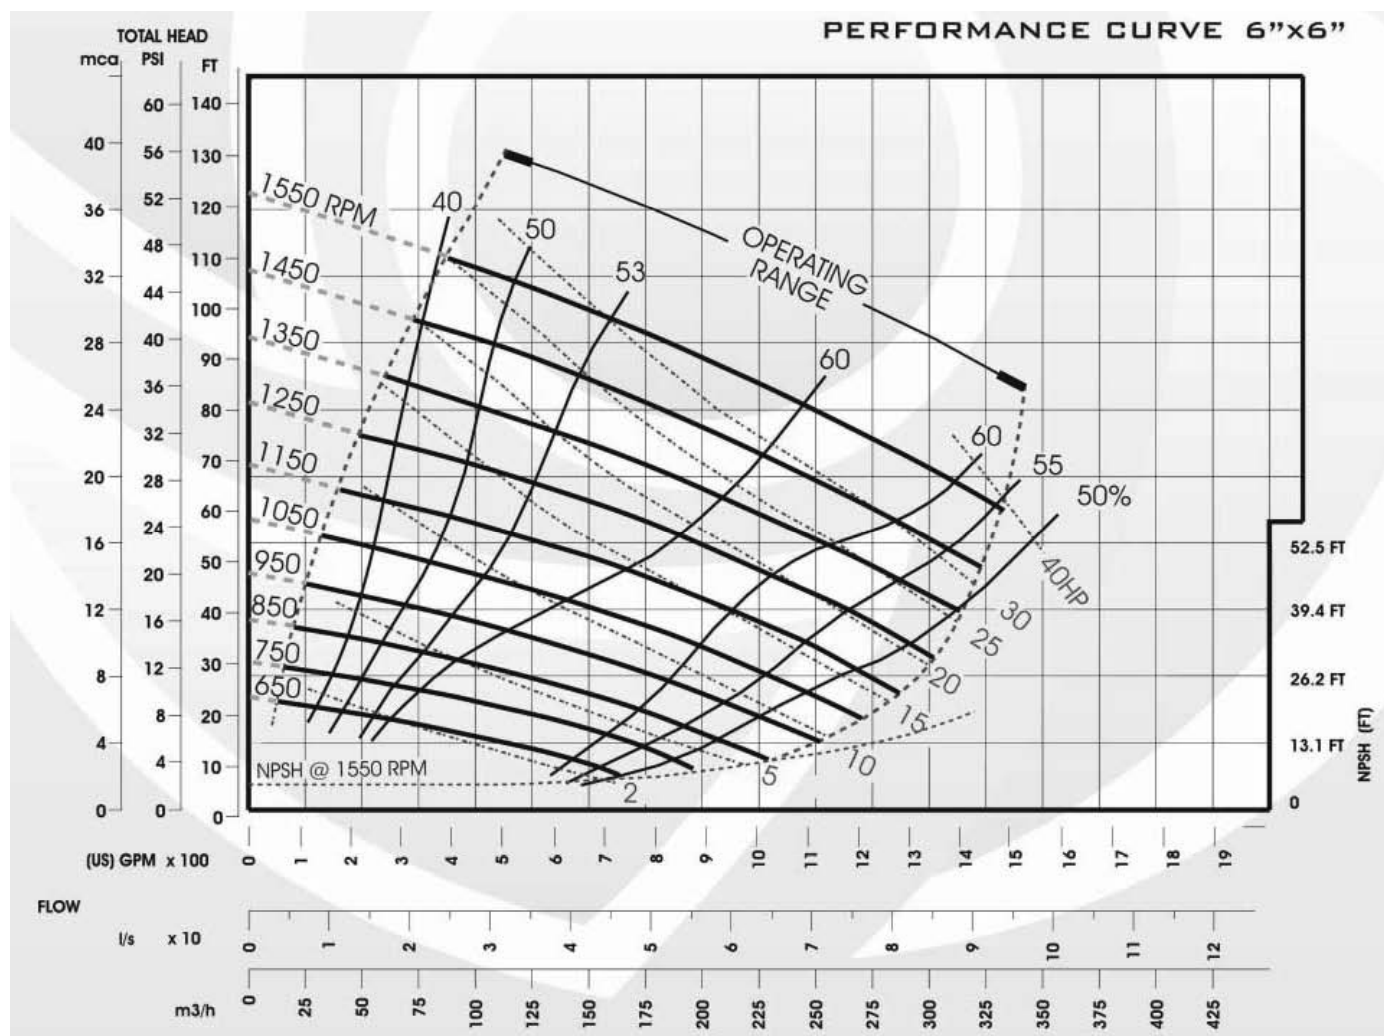

Data Sheet

Net Weight: 802 lbs. (364kg)

Shipping Weight: 862 lbs. (391kg)

Impeller Dia.: 12-3/8" (314.32mm)

R.P.M.: From 650 RPM to 1550 RPM

Max. Solids: 3" (76.2mm)

Repriming Lifts

RPM	650	750	850	950	1050	1150-1250	1350	1450	1550
FEET	8	9	12	14	18	21	22	23	25
METERS	2.4	2.7	3.7	4.2	5.5	6.4	6.7	7.0	7.6

Figure NPSH prior to using above chart. DO NOT use as NPSH Suction Lift.

3.0" Dia. Max. Spherical Solids.



EBARA Fluid Handling

www.pumpsebara.com

(803) 327-5005 (p) • (803) 327-5097 (f)


Performance Curves

Project: GPM: TDH: EFF: HP: Chk'd: Date:

EFQT8

Impeller Diameter: 14.75"

S.G.: 1.0

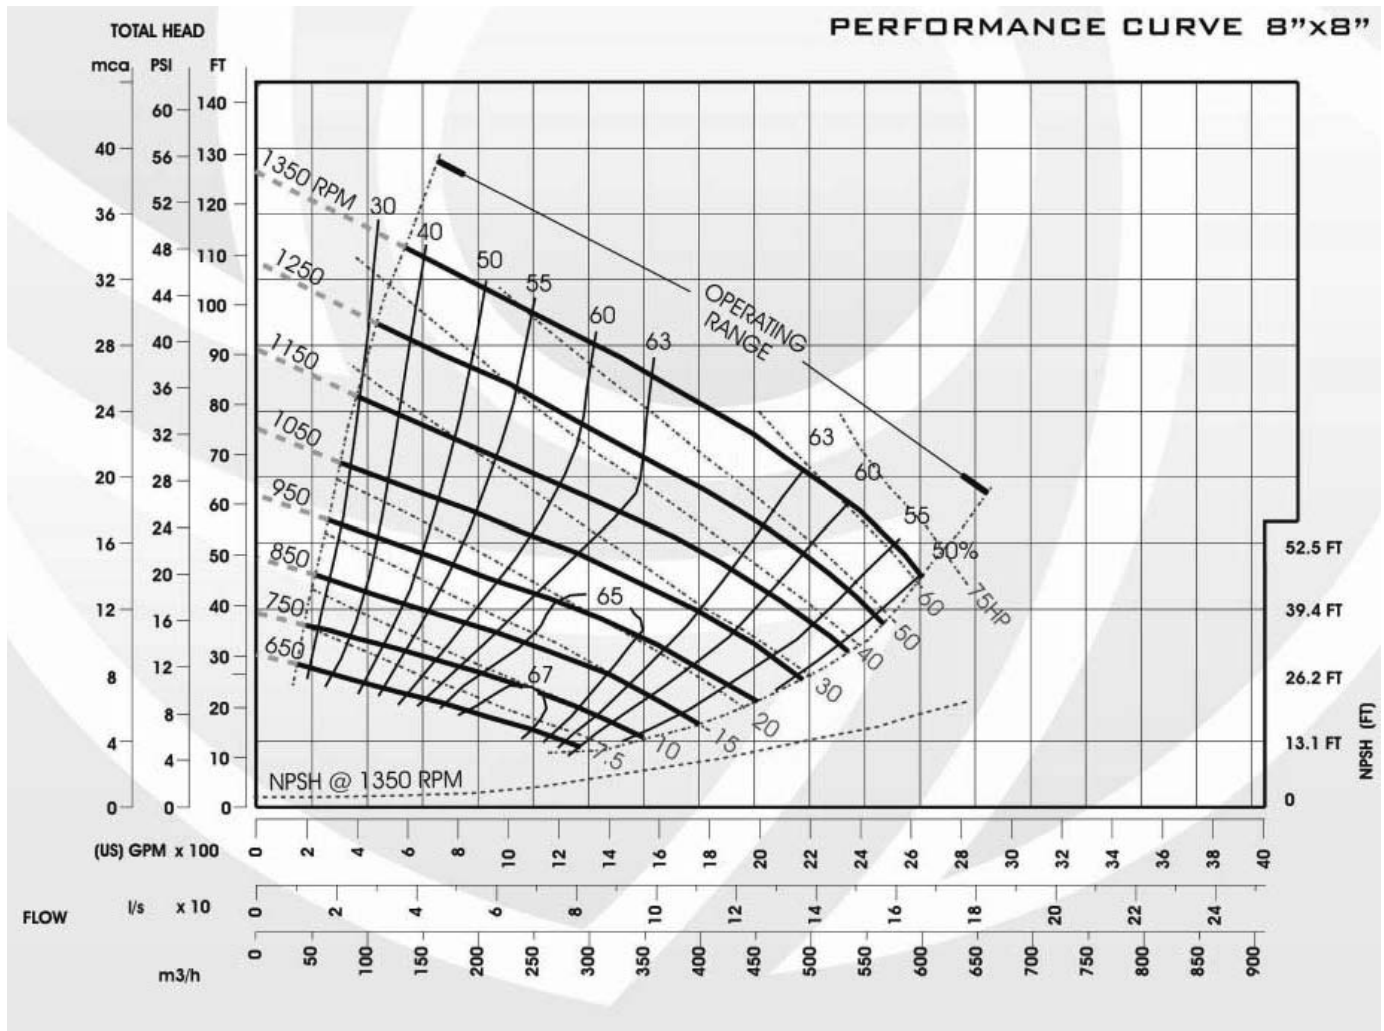

Data Sheet

Net Weight: 1129 lbs. (581kg)
 Shipping Weight: 1399 lbs. (634kg)
 Impeller Dia.: 14-3/4" (374.65mm)
 R.P.M.: From 650 RPM to 1350 RPM
 Max. Solids: 3" (76.2mm)

Repriming Lifts

RPM	650	750	850	950	1050	1150	1250	1350
FEET	9	12	15	17	20	21	22	23
METERS	2.7	3.7	4.6	5.2	6.1	6.4	6.7	7.0

Figure NPSH prior to using above chart. DO NOT use as NPSH Suction Lift.
 3.0" Dia. Max. Spherical Solids.

Performance Curves

Project:

GPM:

TDH:

EFF:

HP:


Chk'd:

Date:

EFQT10

Impeller Diameter: 14.75"

S.G.: 1.0

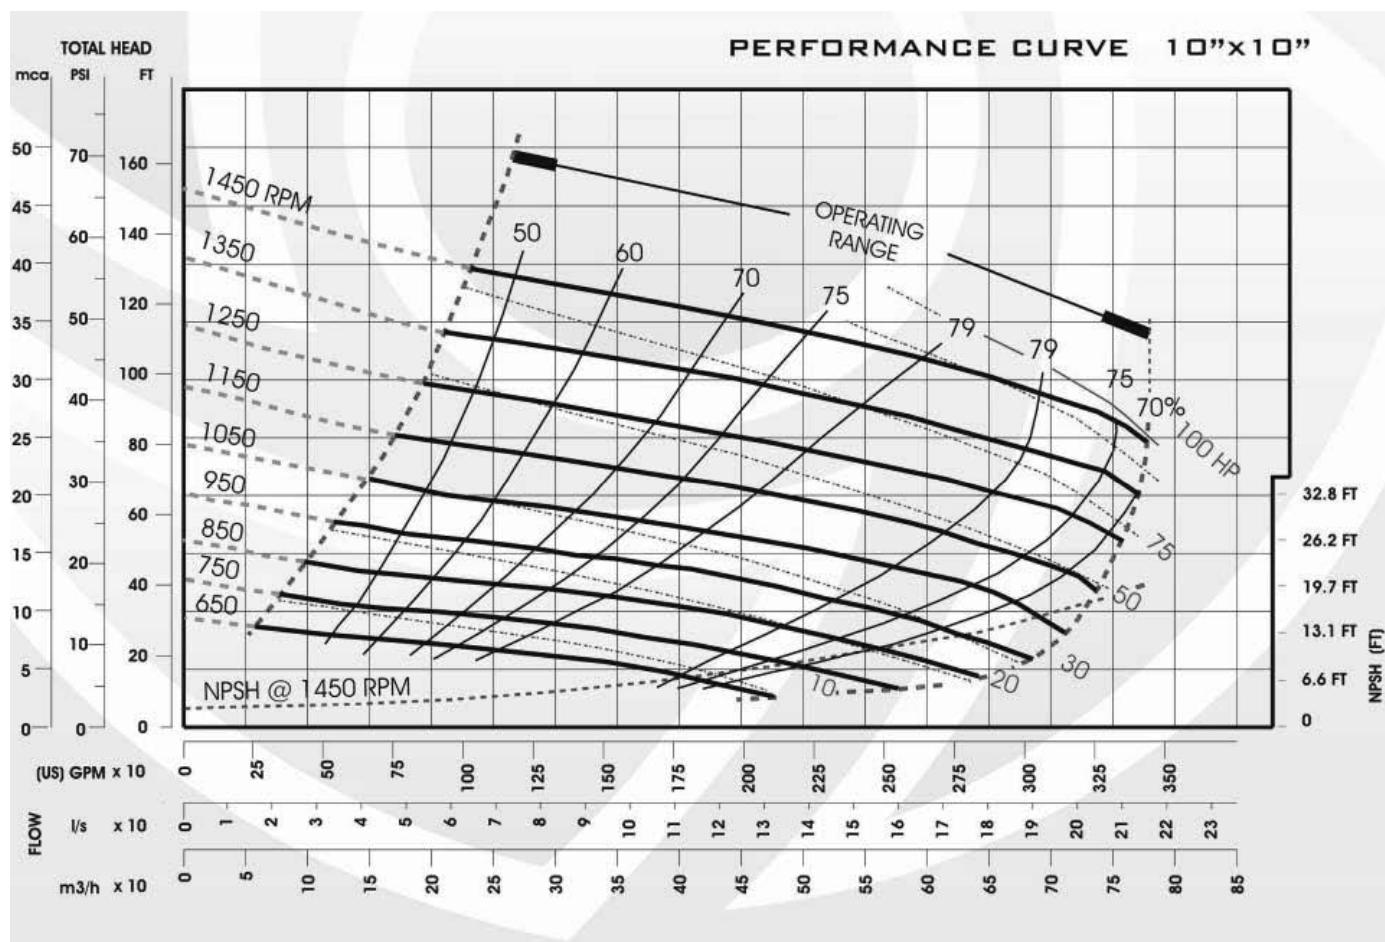

Data Sheet

Net Weight: 1400 lbs. (635kg)

Shipping Weight: 1461 lbs. (663kg)

Impeller Dia.: 14-3/4" (374.65mm)

R.P.M.: From 650 RPM to 1450 RPM

Max. Solids: 3" (76.2mm)

Repriming Lifts

RPM	650	750	850	950	1050	1150	1350-1450
FEET	7	11	14	17	19	18	22
METERS	2.1	3.4	4.3	5.2	5.5	5.5	6.7

Figure NPSH prior to using above chart. DO NOT use as NPSH Suction Lift.

3.0" Dia. Max. Spherical Solids.



EBARA Fluid Handling


www.pumpsebara.com

(803) 327-5005 (p) • (803) 327-5097 (f)

Performance Curves

Project: GPM: TDH: EFF: HP: Chk'd: Date:

EFQT12

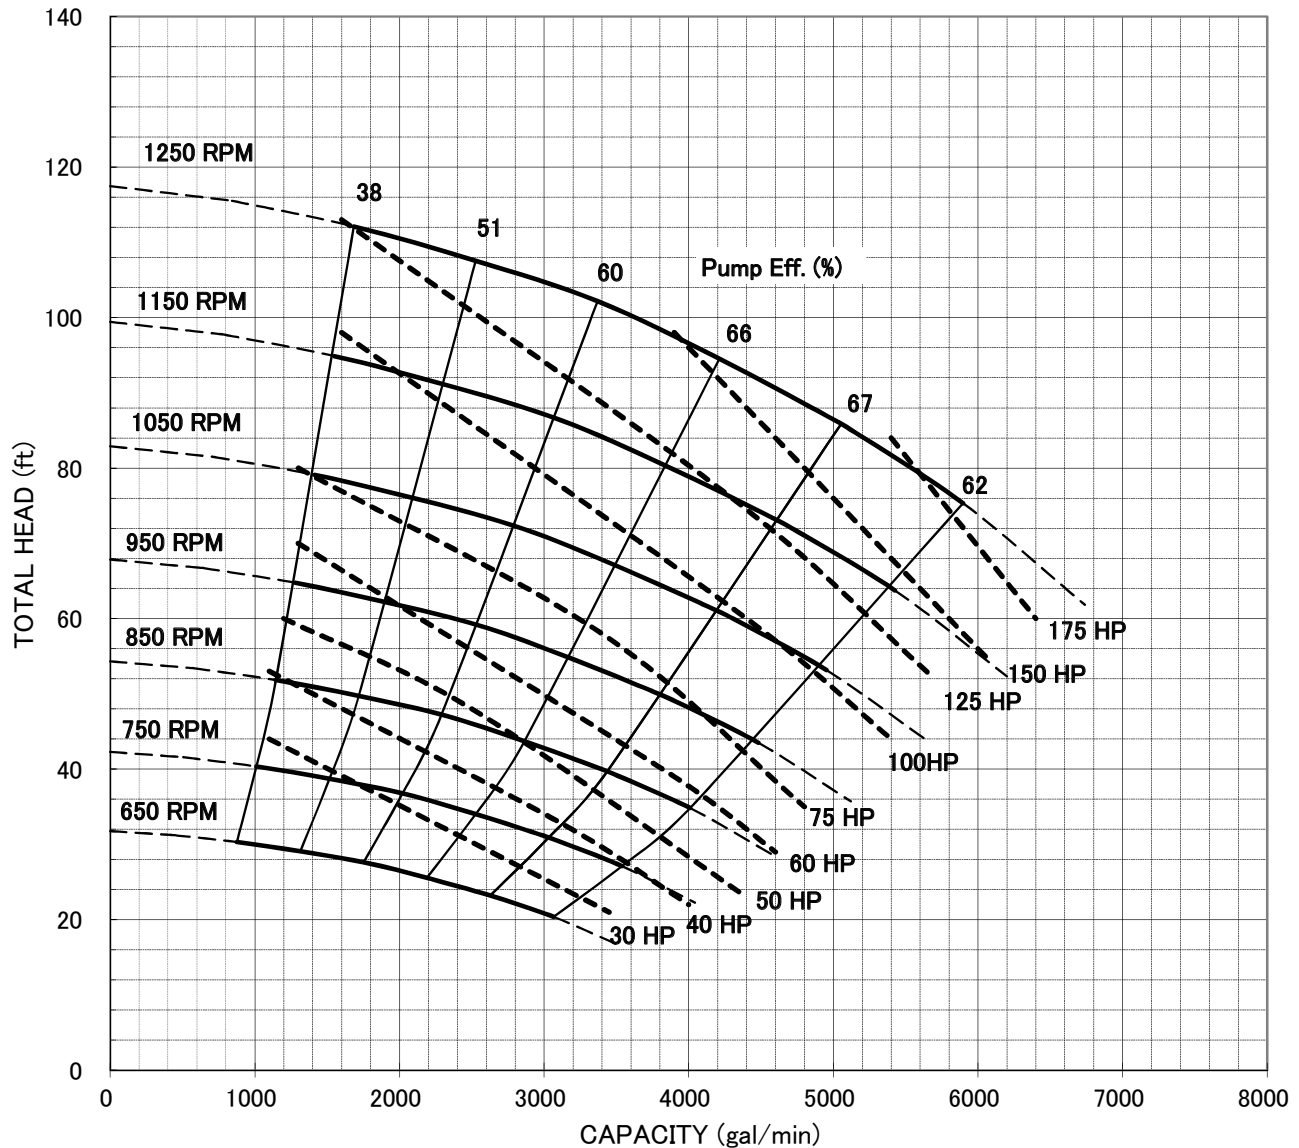

Data Sheet

Net Weight: 2,860 lbs. (1,300kg)

Impeller Dia: 16-1/16" (405mm)

R.P.M.: From 650 RPM to 1250 RPM

Max. Solids: 2-1/2" (65mm)

Repriming Lifts

RPM	650	750	850	950	1050	1150	1250
Feet	13.1	14.1	15.4	16.4	16.7	17.4	18.0
Meters	4	4.3	4.7	5	5.1	5.3	5.5



EBARA Fluid Handling

www.pumpsebara.com

(803) 327-5005 (p) • (803) 327-5097 (f)

Performance Curves

Project:

GPM:

TDH:

EFF:

HP:


Chk'd:

Date:

EFQU3

Impeller Diameter: 11"

S.G.: 1

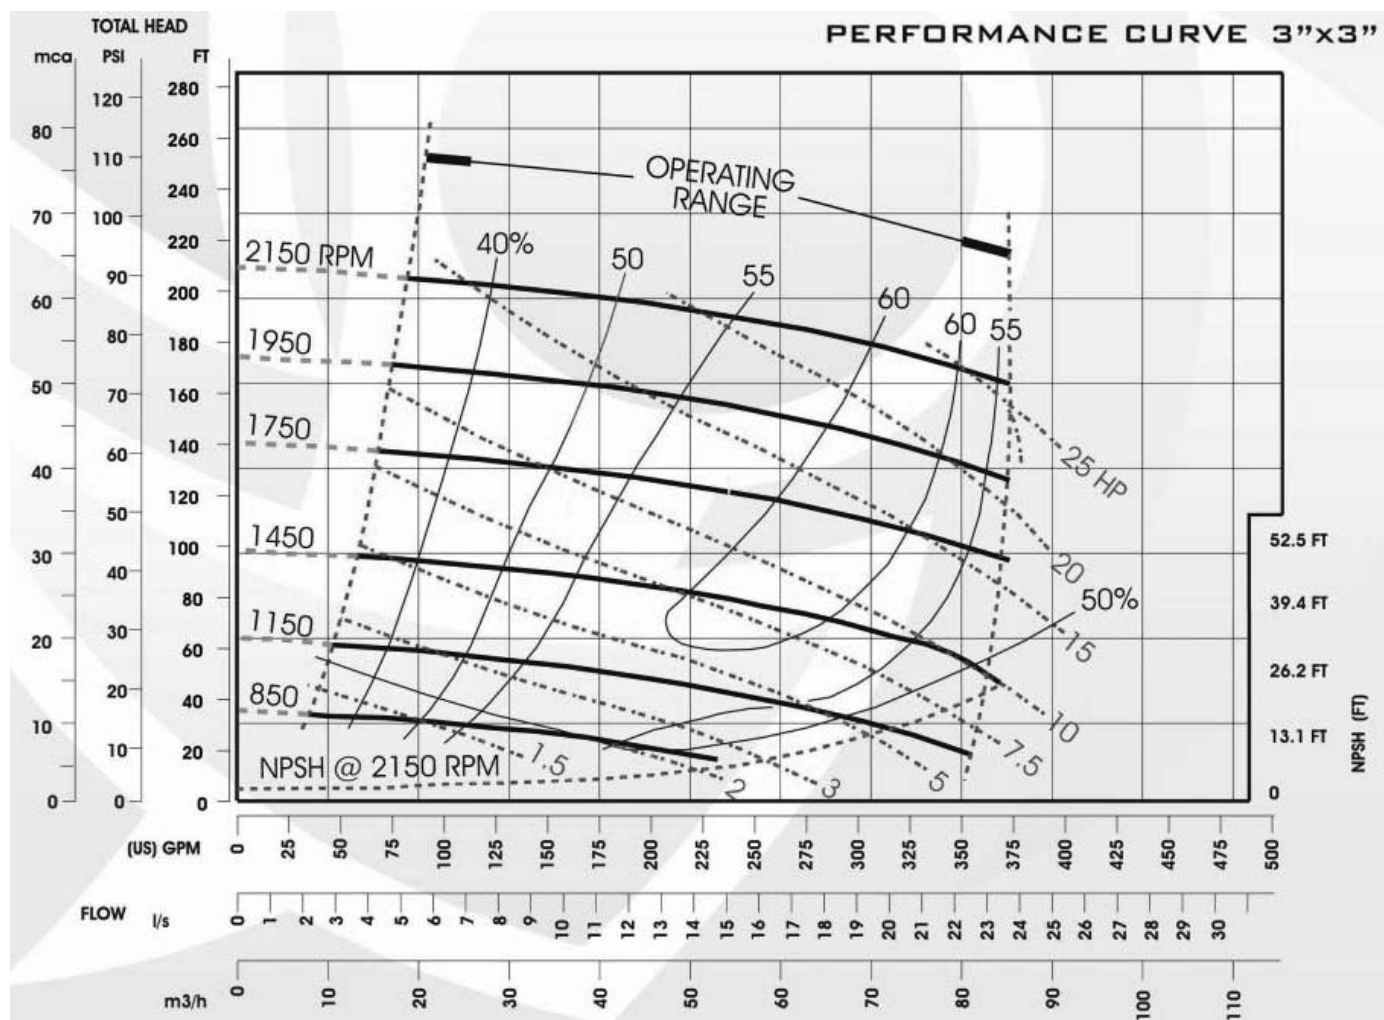

Data Sheet

Net Weight: 472 lbs. (214 kg)

Shipping Weight: 497 lbs. (225 kg)

Impeller Dia.: 11" (279.4mm)

R.P.M.: From 850 RPM to 2150 RPM

Max. Solids: 13/16" (20.63mm)

Repriming Lifts

RPM	850	1150	1450	1750-2150
FEET	7	9	15	25
METERS	2.3	2.9	4.5	7.6

Figure NPSH prior to using above chart. DO NOT use as NPSH Suction Lift.

13/16" Dia. Max. Spherical Solids.



EBARA Fluid Handling

www.pumpsebara.com

(803) 327-5005 (p) • (803) 327-5097 (f)


Performance Curves

Project: GPM: TDH: EFF: HP: Chk'd: Date:

EFQU4

Impeller Diameter: 11"

S.G.: 1

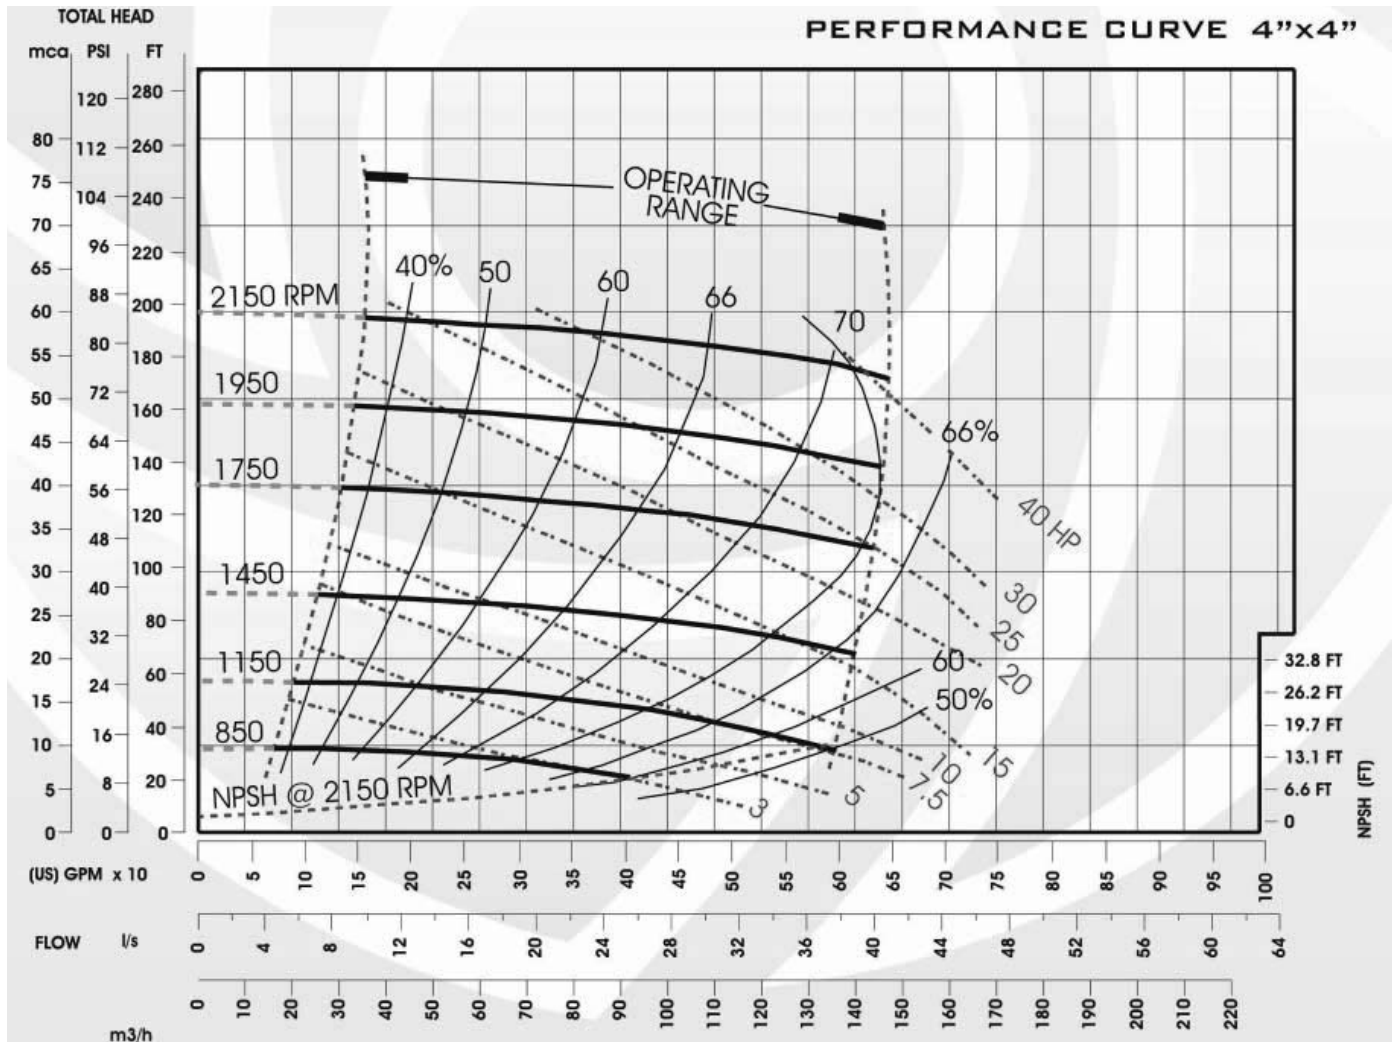

Data Sheet

Net Weight: 600 lbs. (272 kg)
 Shipping Weight: 655 lbs. (297 kg)
 Impeller Dia.: 11" (279.4mm)
 R.P.M.: From 850 RPM to 2150 RPM
 Max. Solids: 1 1/8" (28.57mm)

Repriming Lifts

RPM	850	1150	1450	1750	1950	2150
FEET	5	10	12	13	15	17
METERS	1.6	3.0	3.6	3.9	4.5	5.2

Figure NPSH prior to using above chart. DO NOT use as NPSH Suction Lift.
 1.12" Dia. Max. Spherical Solids.


Performance Curves

Project: _____ GPM: _____ TDH: _____ EFF: _____ HP: _____ Chk'd: _____ Date: _____

EFQU6

Impeller Diameter: 12.5"

S.G.: 1

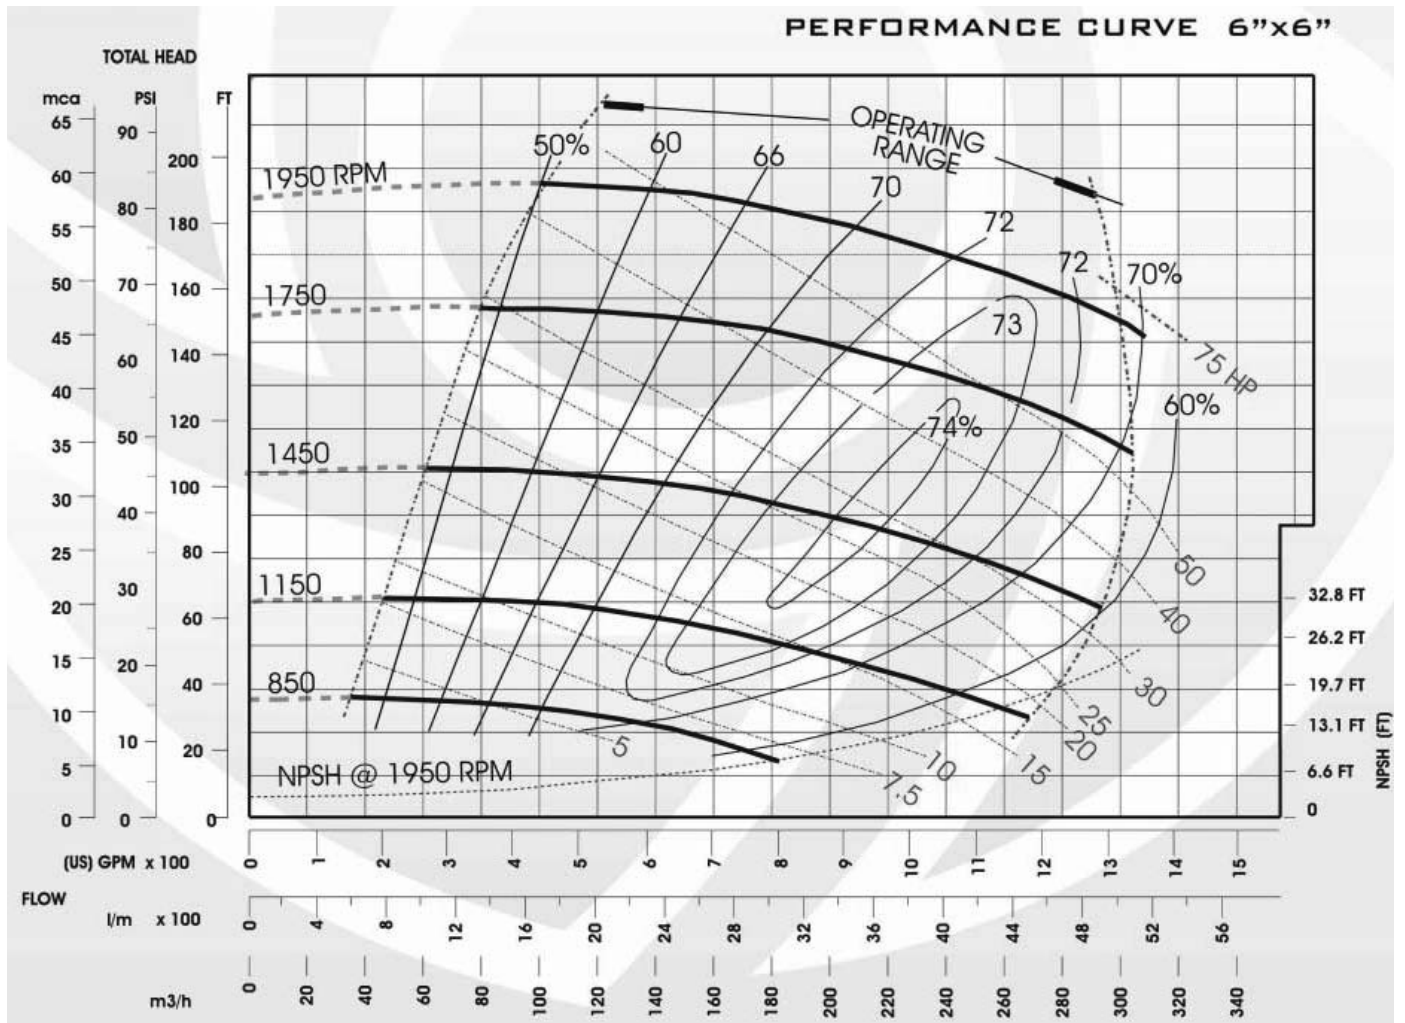

Data Sheet

Net Weight: 910 lbs. (413 kg)
 Shipping Weight: 965 lbs. (437 kg)
 Impeller Dia.: 12 1/2" (317.5mm)
 R.P.M.: From 850 RPM to 1950 RPM
 Max. Solids: 1 1/4" (31.75mm)

Repriming Lifts

RPM	850	1150	1450	1750-1950
FEET	8	10	14	15
METERS	2.4	3.0	4.2	4.5

Figure NPSH prior to using above chart. DO NOT use as NPSH Suction Lift.
 1.25" Dia. Max. Spherical Solids.